


Material: Nickel-plated brass
 Claw: PA66 (Nylon) , UL94-V2
 Hermetic seal: NBR, Silicone rubber
 O-Ring: NBR, Silicone rubber
 Protection degree: IP68-10 bar
 Temperature: Static state: -40 °C to 100 °C ,Short time to 120 °C ;Dynamic state: -20 °C to 80 °C ,Short time to 100 °C



Item	Range	Thread Length	Thread O.D.	Joint Length	Spanner size
M12×1.5	3-6.5	6.5	12	17	14
M16×1.5	4-8	8	16	19	18
M18×1.5	5-10	8	18	21	20
M20×1.5	6-12	8	20	22	22
M22×1.5	10-14	8	22	23	24
M25×1.5	10-14	9	25	25	24/27
M25×1.5	13-18	9	25	27	30/27
M27×1.5	13-18	9	27	27	30
M32×1.5	15-22	10	32	29	35
M36×1.5	18-25	10	36	31	40
M40×1.5	18-25	10	40	31	40/45
M40×1.5	22-30	10	40	35	45
M48×1.5	25-33	10	48	37	50/52
M50×1.5	32-38	10	50	37	57/55
M53×1.5	37-44	10	63	38	64/68
M72×2	42-52	10	72	44	78
M80×2	55-60	15	80	45	88
PG7	3-6.5	6.5	12	17	14/15
PG9	4-8	8	16	19	17/18
PG11	5-10	8	18	21	20/21
PG13.5	6-12	8	20	22	22/23
PG16	10-14	8	22	23	24/25
PG21	13-18	9	27	27	30
PG29	18-25	10	36	31	40
PG36	25-33	10	48	37	50
PG42	32-38	10	50	37	57
PG48	37-44	10	63	38	64

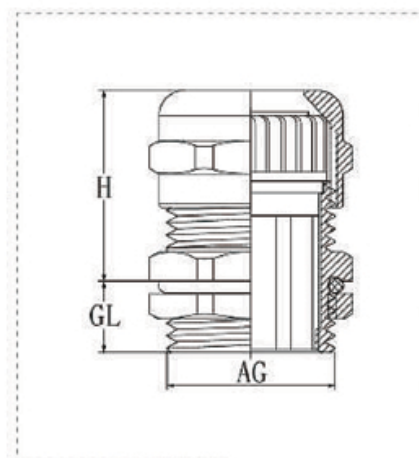