



**IP42**

**ALUMINIUM  
CASE**


## REEL FEATURES

- Die-cast aluminium case with epoxy resin paint.
- Cable roller guide.
- Ratchet stop device every 50 cm.

**All cable reels are supplied with predisposition for cable-stop device off.**

It can be easily inserted.

- Double earth contact.
- Collector insulating power 2,5 KV.
- Brass-rings collector and special brushes with minimum impedance drop.
- Slipping with brass rings and brushes.
- Protection degree IP42.
- Working temperature -5°C/+50°C.
- Delivered without cable at feeding side.
- Available both with PVC cable and rubber cable.

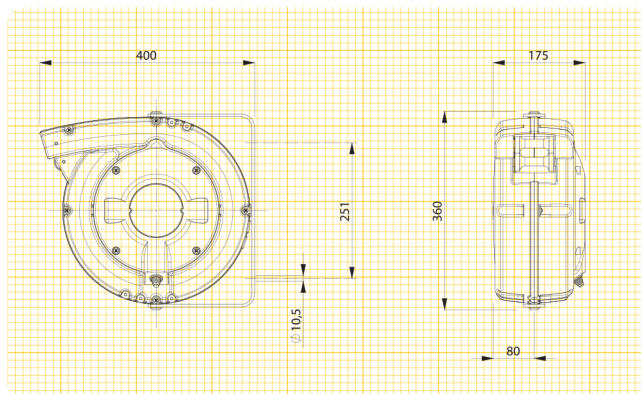

EN 61242 EN 60335-1



2014/35/UE 2006/42/CE  
2011/65/UE